
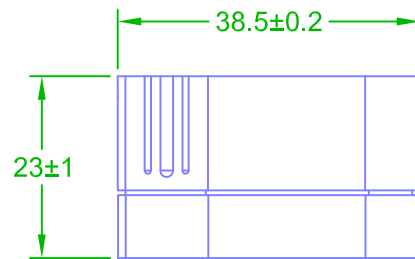
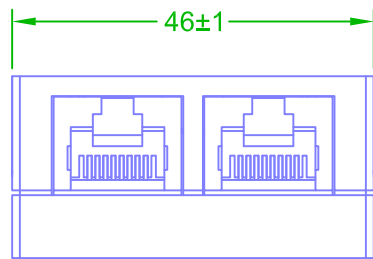


Label

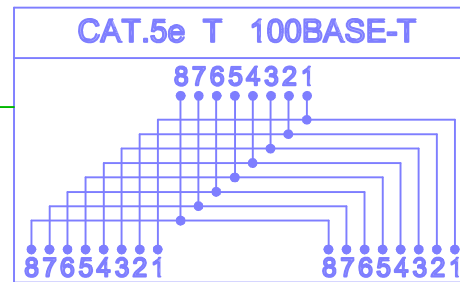

Performance:

Meets C5e EIA/TIA 568B Standard.

Materials:

Body : Fireproof ABS UL-94V0

Jack : 8P8C 50 micro inches gold plated

PCB : FR-4 / UL-94V0

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)

Contact Resistance: 20m ohms (max.)

Current Rating : 1.5 Amps .

DC Resistance: 0.1 ohms (max.)

Withstanding Voltage: 1000 VAC RMS@ 60Hz / 1 min.

Mechanical Specifications:

Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C



		3RD		Drawing	<i>Chidy</i>	Date	2023/08/25	Part No.	IC-PM05-02
A	An initial version	Unit	m/m	Checked	<i>Chris</i>	Date	2023/08/25	Description	
Rev	Description	Scale	1:1	Approved	<i>Jason</i>	Date	2023/08/25	C5e T-MOD Adapter, UTP, RJ-45 Jack + RJ-45 Jack +RJ-45 Jack	



Plug Master
INDUSTRIAL CO., LTD
www.plugmaster.com.tw