

Performance :
Meets C6 EIA/TIA 568B Standard.

Materials :

- Front Plate : Fireproof ABS UL-94V0
- Panel : Metal(SPCC)
- Jack : 8P8C 50 micro inches gold plated
- PCB : FR-4 / UL-94V0
- IDC Body : Fireproof ABS UL-94V0
- IDC Pin : Bronze & Tinned

IDC Description : For 22-26 AWG.
For 110 or Krone punch-down Tool



Electrical Specifications :

- Insulation Resistance : 500M ohms(min.)
- Contact Resistance : 20m ohms(max.)
- Current Rating : 1.5Amps.
- DC Resistance : 0.1m ohms(max.)
- Withstanding Voltage : 1000VAC RMS@60Hz/1 min.

Mechanical Specifications :

- IDC Punch Down Cycle : Qver 250 Cycles(min.)
- Jack Insertion Cycle : Qver 2000 Cycles(min.)

Operation Temperature : -40°C to 70°C.

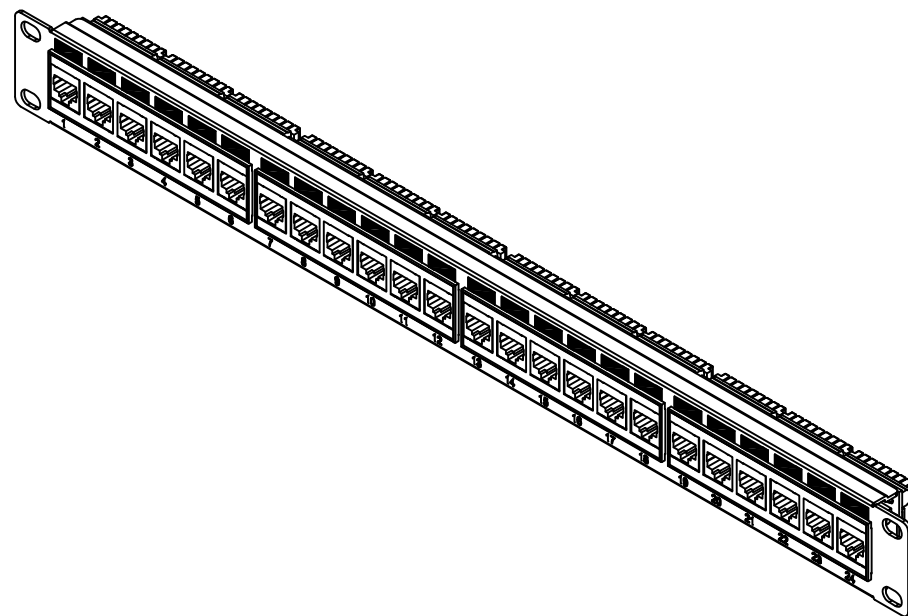

NOTE TOL:±1

		3RD		Drawing	<i>Chidy</i>	Date	2023/12/27	Part No.	PP-PM06-01
A	An initial version	Unit	m/m	Checked	<i>Chris</i>	Date	2023/12/27	Description Patch Panel	
Rev	Description	Scale	1:1	Approved	<i>Jason</i>	Date	2023/12/27		



Plug Master
INDUSTRIAL CO., LTD
www.plugmaster.com.tw