



Drawing Number: P8-069-1-□□□□□

- Housing Material: Polycarbonate, UL Flammability Rating:
 - ①=UL 94V-0, RoHS Compliant.
 - ②=UL 94V-2, RoHS Compliant.
- Contacts Type:
 - ①=Straight pin fits Stranded wire only.
 - ②=Two prong angled pin fits Solid/Stranded Wires.
 - ③=Three prong pin fits Solid/Stranded Wires.
- Gold Plating:
 - Ⓕ= Fu" (Flash), Ⓖ= 2-3u" ($0.0508 \mu\text{m} \leq A \leq 0.0762 \mu\text{m}$),
 - Ⓖ= 3u" ($\geq 0.0762 \mu\text{m}$), Ⓗ= 6u" ($\geq 0.1524 \mu\text{m}$),
 - Ⓒ= 15u" ($\geq 0.381 \mu\text{m}$), Ⓓ= 30u" ($\geq 0.762 \mu\text{m}$),
 - Ⓔ= 50u" ($\geq 1.27 \mu\text{m}$).
- Packaging Quantity:
 - Ⓢ= 1000pcs, Ⓣ= 500pcs, Ⓤ= 250pcs, Ⓟ= 200pcs
 - Ⓡ= 100pcs, Ⓧ= 50pcs, Ⓨ= 25pcs, Ⓩ= 10pcs
 - Ⓤ= Other
- Housing Color: Transparent, other colors are available. (Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)
- Shielded Material: Brass with nickel plated, or Non-Shielded.
- Operating Temperature: -10°C to 60°C .

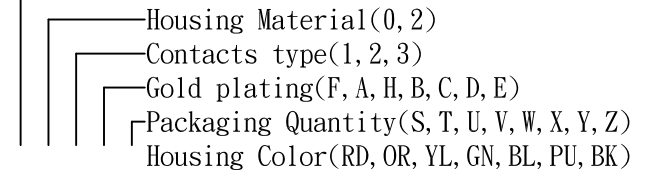

NO: PX-0XX-□□□□□

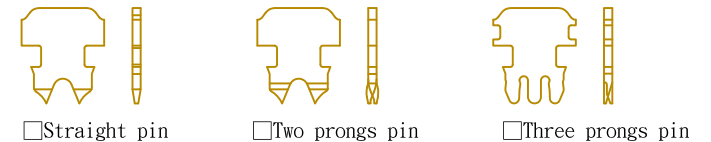

NOTE TOL: ± 0.1

B	2018.03.02. Rescheduling coding	3RD		Drawing	Chidy	Date	2014/05/29	UL Code	L8P8C-S1
A	An initial version	Unit	m/m	Checked	Chris	Date	2015/11/05	Description	
Rev	Description	Scale	1:1	Approved	Jason	Date	2015/11/05	F Shielded 2 Layers with conductor hole 1.2mm and Cable clip	



Plug Master
INDUSTRIAL CO., LTD
www.plugmaster.com.tw