

Specifications :

1.Material:ABS,UL 94-V0,Blue Color.

2.Dimensions:

Master:90mm*59mm*25mm.

Remote:59mm*25mm*25mm.

3.Battery:DC 9V.

Features:

1.Can test the entire Network System or individual Patch Cord.

2.Easy to verify cable continuously,open,short and misswire.

3.Can test either Twist Cable or Telephone Cable.

4.Can test RJ45,RJ11 and RJ12.

5.When working,the LED light would flash as following chart:

	Twist Pair Cable		Telephone Cable	
	straight	crossover	Master	Remote
Master	Remote	Remote	Master	Remote
1&2	1&2	3&6	NC	NC
3&6	3&6	1&2	3&6	3&6
4&5	4&5	4&5	4&5	4&5
7&8	7&8	7&8	NC	R
1&2	1&2	3&6	NC	NC
3&6	3&6	1&2	3&6	3&6
---	---	---	---	---

LED Indications:

1.1&2 , 3&6 , 4&5 , 7&8:Green Light is Normal.


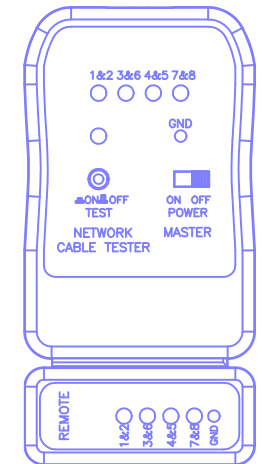
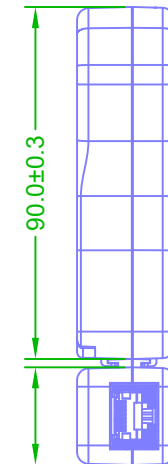
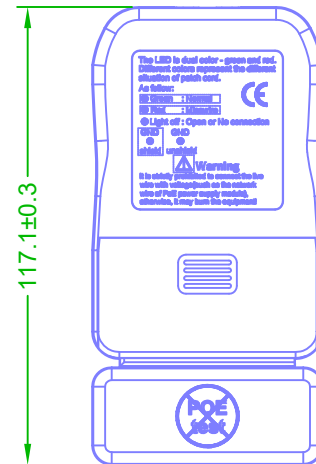
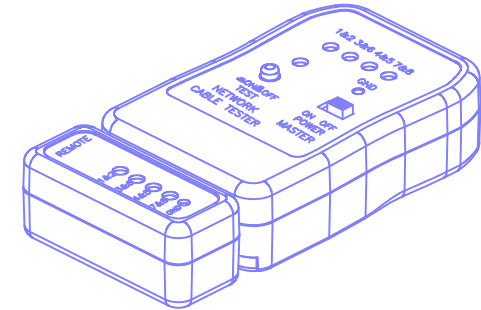

Red Light is Miss-Wire.



LightOff is No Connection.

2.GND:Green Light STP Ground Connection.

Light Off No Ground Connection.

3.Power:Flashing Red Light Power On.



A2	2025/04/28 Revised Date	3RD		Drawing	<i>Chidy</i>	Date	2025/04/28	Part No.	PM-YL-1	 <div>Plug Master INDUSTRIAL CO., LTD www.plugmaster.com.tw</div>
A	An initial version	Unit	m/m	Checked	<i>Chris</i>	Date	2025/04/28	Description		
Rev	Description	Scale	1:1	Approved	<i>Jason</i>	Date	2025/04/28	Cable Tester		